


BAYEUX FOUNTAIN HC130

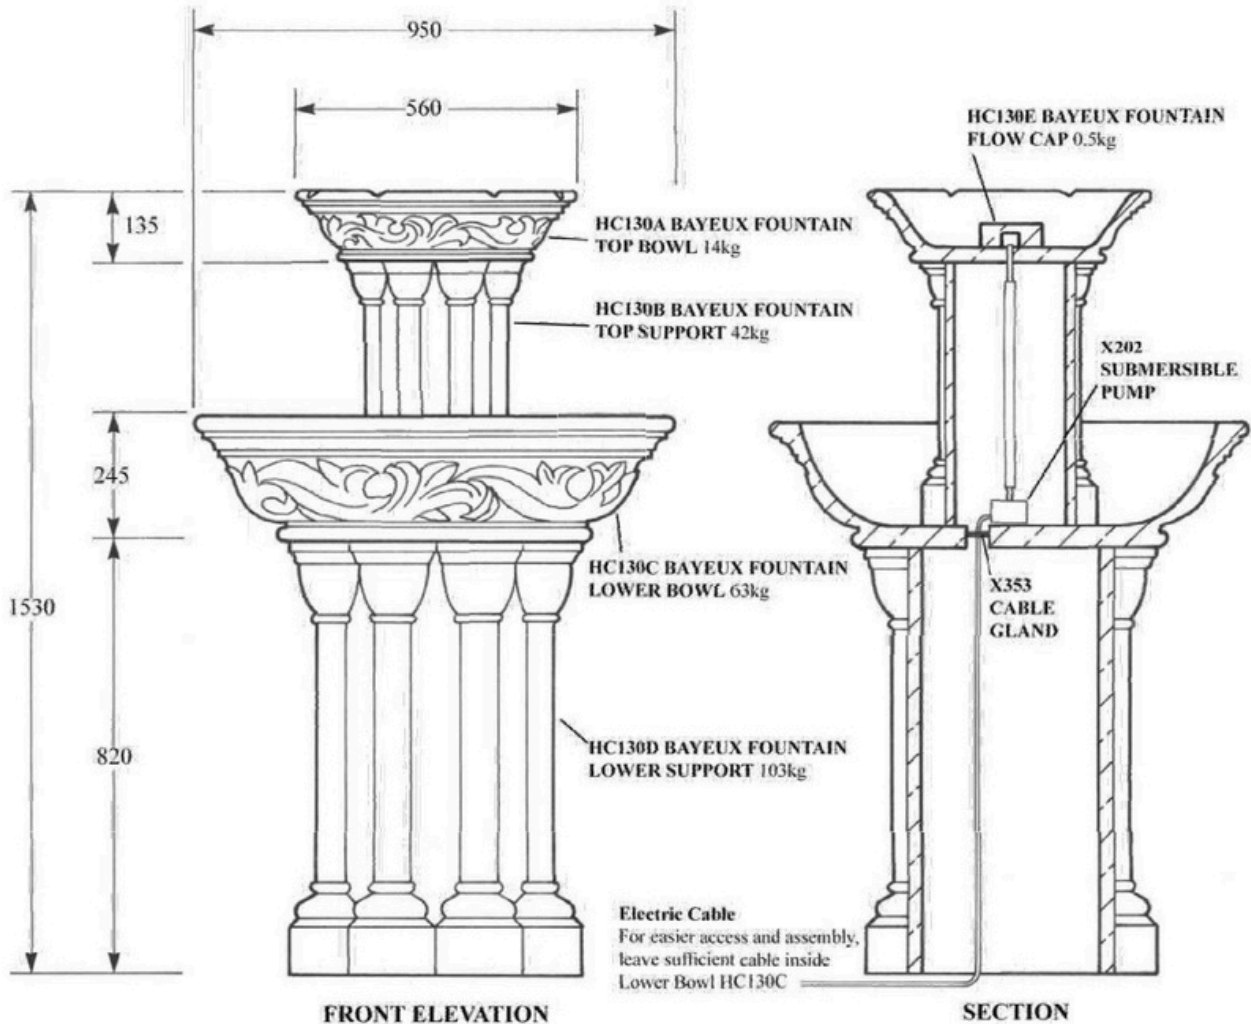

COMPONENT LISTING:

HC130A Bayeux Fountain Top Bowl
 HC130B Bayeux Fountain Top Support
 HC130C Bayeux Fountain Lower Bowl
 HC130D Bayeux Fountain Lower Support
 HC130E Bayeux Fountain Flow Cap
 HC130F Bayeux Fountain Pump Cover

WEIGHT

14kg
 42kg
 63kg
 103kg
 0.5kg
 0.5kg

ASSEMBLY RECOMMENDATIONS:

It is essential that the fountain is sited on a firm and level area. Foundations to suit site conditions and loadings (to be designed by others).

An 8:1 sand/cement bedding mortar should be used to ensure that the weight of the fountain is evenly spread to avoid any pivoting or twisting strain. Allow 6mm for bedding joints.

PLUMBING COMPONENT LISTING:

X202 Submersible Pump inc pipework
 X353 Cable Gland

Consult a qualified electrician to ensure electrical supply conforms with all regulations/codes.

Unless otherwise stated, all materials other than stonework to be supplied by others.

CABLE GLAND: Thread electrical cable through gland before positioning the gland in the hole. Tighten bolts until gland is water tight.

To guard against frost damage, drain off the water before winter and do not replace until the hard frosts are past in the following spring.