



PLUMBING HALF SMALL POOL (X355A)

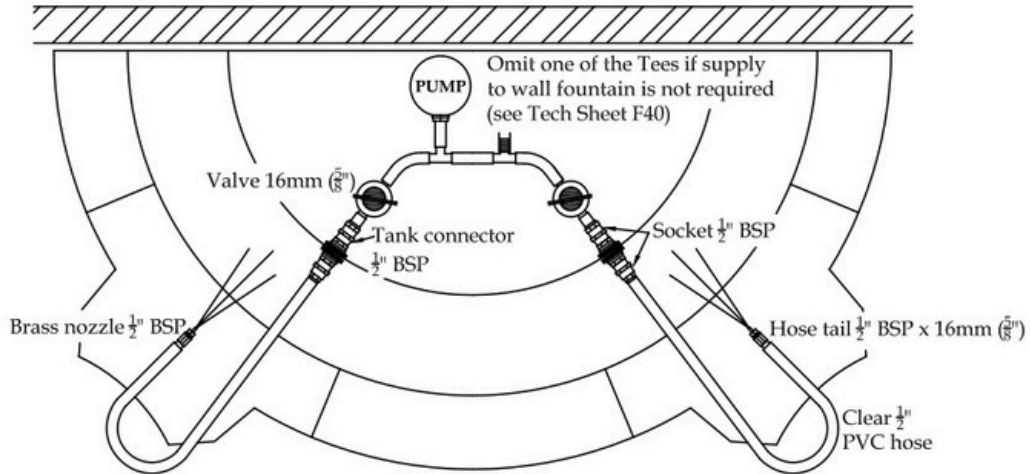

COMPONENT LISTING: X355 (Vase sections)

Tee 16mm ($\frac{5}{8}$ ") barbed	x 2
Valve 16mm ($\frac{5}{8}$ ")	x 2
Tank connector $\frac{1}{2}$ " BSP	x 2
Socket $\frac{1}{2}$ " BSP	x 4
Hose Tail $\frac{1}{2}$ " BSP x 16mm ($\frac{5}{8}$ ")	x 6
Brass nozzle $\frac{1}{2}$ " BSP	x 2
Clear $\frac{1}{2}$ " PVC hose	5m (17 ft)

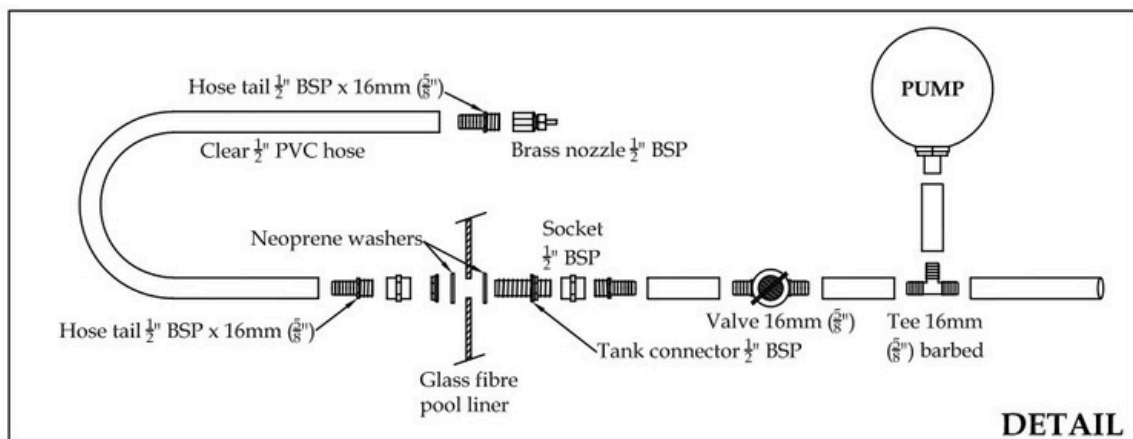

To ensure a watertight seal, all threaded joints require the use of PTFE tape (supplied)

To ease connections, hot water may be used to soften PVC hoses

Consult a qualified electrician to ensure electrical supply conforms with all regulations/codes

Unless otherwise stated, all material other than stonework to be supplied by others - all hosing to be cut on site
Read in conjunction with Tech Sheet P40
Pumps extra - see price list